



**Integrated Control Systems  
International™**

## **“LEGEND®” PAY STATION**

**Model PS-2010**

**Pay & Display  
and/or Pay By Space**



Model “XC” in blue

### **Features:**

- Electronically Accepts 5 Coins & up to 1 Token
- Credit Card & “Smart” Card options
- Dispenses change in 4 denominations
- Single, multiple, or variable rate capabilities
- Pay and Display or Pay-By-Space
- Audible Instructions
- Bill Cassettes capable of 600, 1000, or 1200 notes
- Reversible Large Screen “LCD” display
- Locking Coin Box or Bag w/\$600 coin cap.
- Audible Alarm System
- Thermostat controlled cooling fan
- Thermostat controlled heater
- High Security hardware locking system
- MS-Windows® compatible operating system
- Adjustable intensity thermal printer
- Detailed audit functions & reporting
- 110VAC / 24Vdc battery back-up
- Optional Solar Power
- Optional Multiple Denomination Bill Acceptor
  - with lockable stacking cassette
- Pedestal housing with locked coin vault & battery back-up.

**icsi**

**917 Eldorado Drive  
Escondido, CA 92025-6717**

**Phone: 760-432-8337**

**Fax: 760-432-8347**

**website: [www.icsiparc.com](http://www.icsiparc.com)**



## **Integrated Control Systems International™**

### **Purpose:**

The **icsi** “*Legend*” FS-4100 Pay Station, manufactured by QBS and distributed through Dominion Self Park Systems, is a revenue control device that provides for rapid and accurate collection of the parking fee within a parking facility. The parking fee is satisfied through the use of the parking patron’s credit card or currency, and is accomplished without the need for an attendant or cashier. Upon completion of the payment transaction, a “validated” ticket is issued to the patron for use as proof of payment in a “Pay & Display” application and a receipt, or a receipt for payment in a “Pay By Space” application.


### **Operation:**

After parking their vehicle within a parking space in the parking facility, the parking patron will approach “*Legend*” FS-4100 Pay Station to pay the parking fee and receive their printed / validated receipt. This receipt is designed for display within their locked vehicle as proof of payment for parking fee(s).


### **Physical Characteristics:**

**Size** – The “*Legend*” FS-4100 Pay Station is designed to be placed upon a mounting pedestal. This pedestal is available in several different heights. The “*Legend*” FS-4100 Pay Station itself measures 23 inches in width, 30 inches in height, and 15 inches in depth. The “*Legend*” FS-4100 Pay Station alone, not including the pedestal, weighs approximately 275 pounds.

**Electrical** – The “*Legend*” FS-4100 Pay Station is a low-voltage device, with **all** internal components designed to operate at 24Vdc. This 24Vdc is provided by an internal, UL approved step-down Class-II transformer in the 110VAC model(s). **In lieu of the 110VAC version**, the unit may be equipped with an electric generating solar panel that will “trickle-charge” the internal batteries to provide all the power required for continuous operation.

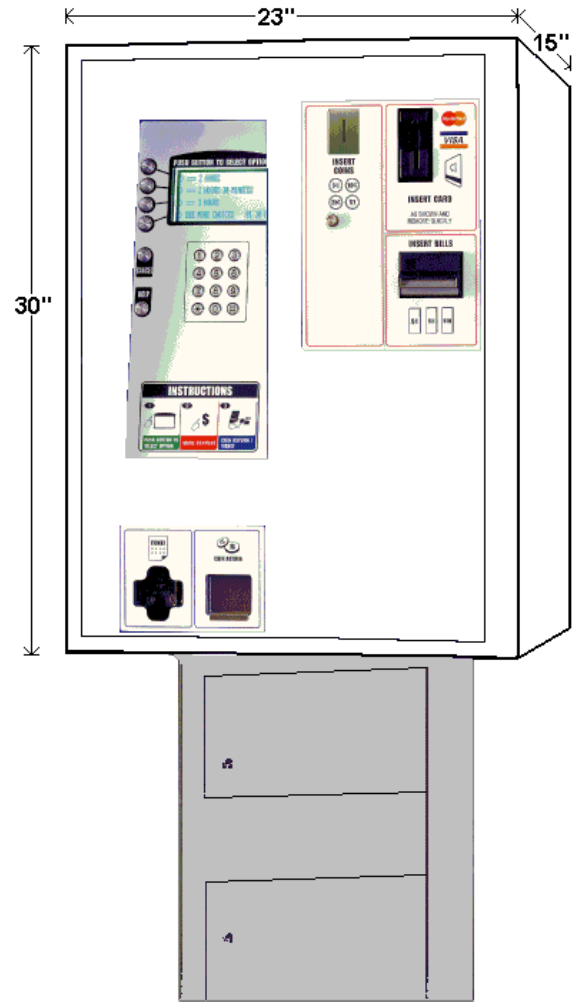

**Assembled in the**



**United States & Canada**

**icsi**  
**917 Eldorado Drive**  
**Escondido, CA 92025-6717**

**Phone: 760-432-8337**  
**Fax: 760-432-8347**  
**website: [www.icsiparc.com](http://www.icsiparc.com)**